



RACCORDS ITAP-FIT®

610 Raccord droit femelle



MESURE	CODE	EMBALLAGE
12x3/8"	610B038012	18/252
12x1/2"	610B012012	14/196
14x1/2"	610B012014	14/196
15x1/2"	610B012015	14/196
16x1/2"	610B012016	14/196
18x1/2"	610B012018	7/182
18x3/4"	610B034018	7/182
20x1/2"	610B012020	10/140
22x3/4"	610B034022	5/130
25x3/4"	610B034025	8/112
28x1"	610B100028	5/55

CERTIFICATION



CARACTÉRISTIQUES

Corps en laiton anti-dé zincification (DZR).

Températures minimum et maximum de fonctionnement: -20 °C, 120 °C (pointes de 150 °C admises).


Pression nominale:

Tube de cuivre: 20 bar à 25 °C, 10 bar à 90 °C.

Tube en PER et polybutylène: 12 bar à 25 °C, 5 bar à 90 °C.

Raccords filetés: ISO 7/1 (équivalent à DIN EN 10226-1 et BS EN 10226-1).

DIMENSIONS

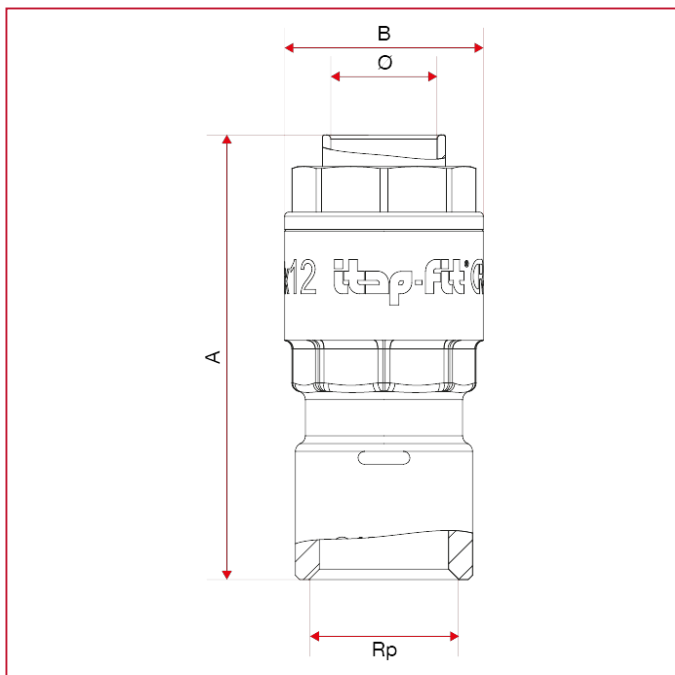




RACCORDS ITAP-FIT®

	12x3/8"	12x1/2"	14x1/2"	15x1/2"	16x1/2"	18x1/2"	18x3/4"	20x1/2"	22x3/4"	25x3/4"	28x1"
A	51,6	55	55	55	55	59	59,6	62	62	64	70
B	23	23	25	26	27	31,5	31,5	34	36	40	43,7

MATÉRIAUX

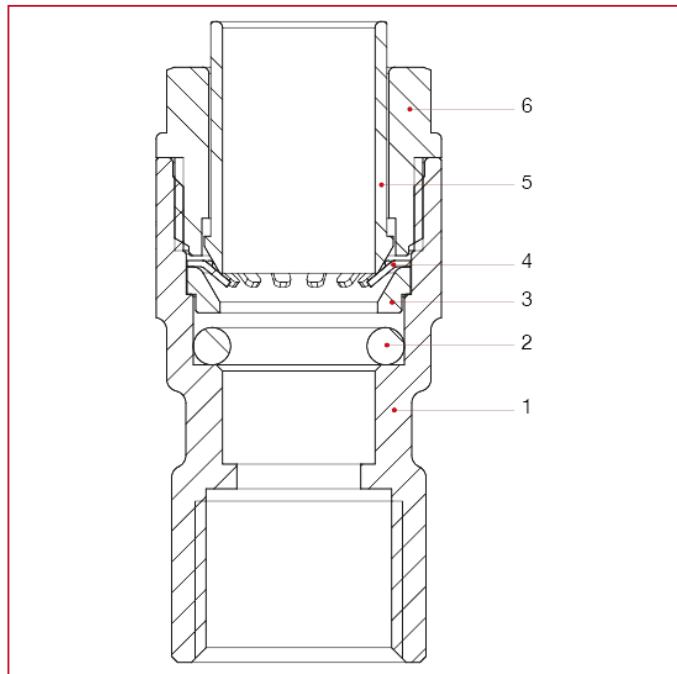

POS.	DESCRIPTION	Q.té	MATÉRIAU
1	Corps	1	Laiton CW625N
2	Joint torique	1	EPDM
3	Entretoise	1	NIRETAN A EXL SC
4	Bague de sécurité	1	Acier inox AISI 301
5	Douille de décrochage	1	GRIVORY GV-5H
6	Manchon	1	GRIVORY GV-5H